

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

www.provita.nt-rt.ru | pia@nt-rt.ru

Технические характеристики на потолочные крепления для инфузий ICS 1, ICS 2, ICS 3, ICS 4 компании PROVITA


Виды товаров: рельсовые системы для гравитационных вливаний, рельсовые системы для инфузии, поворотные опорные кронштейны со встроенным источником питания для инфузии и управления устройством, рельсовые системы со встроенным питанием и сетевым питанием для инфузии и управления устройствами, несущие конструкции, аксессуары, крючки, держатели для мониторов, корзины с зажимами, бутылочные держатели, кольца, полки, лампы и др.

ICS 1



The lightweight rail solution for gravity infusion

Compact, decent rail profile for gravity infusion.



**STRAIGHT & U-SHAPED
CEILING RAILS**
For light loads



CEILING POLE
Durable and application-oriented




Material Aluminium, anodized

Profile size 25 × 25 × 2.25 mm

+ easy
to handle

+ extensible,
extensible &
extensible ...

+ legroom
around the bed

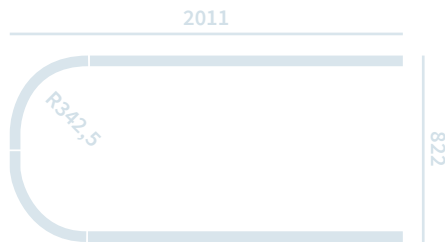

STRAIGHT CEILING RAIL

Linear and decent
from start to finish

Material Aluminium, anodized

Any length through connectors (max. 4,000 mm in one piece)

Load capacity 50.0 kg / m

Standard length 1,000 mm

Special length according to customer requirements

D1AA0013

U-SHAPED CEILING RAIL

The compact, elegant
curved solution

Material Aluminium, anodized

U-size approx. 2,011 × 822 mm, includes 3 connectors and 2 end pieces

Load capacity 50.0 kg / m

Special sizes according to customer requirements

D3FB0013



END PIECE Edge stopper for the ceiling rail

Material Aluminium

Weight 0.01 kg

Z2N07002



CUT-OUT To insert the sliding hook

Z2N07082




CONNECTOR PIECE To connect two rails

Material Stainless steel


Weight 0.03 kg

Z2N07012

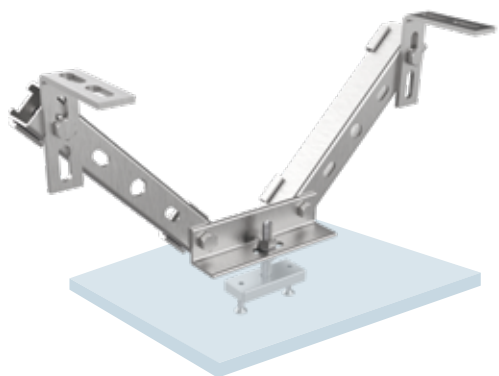

SUBSTRUCTURE "D"
Spacer for gaps between
500 and 1,000 mm

	Distance	Weight
Z2S07436	approx. 200 – 300 mm	approx. 1.0 kg
Z2S07506	approx. 300 – 400 mm	approx. 1.2 kg
Z2S07446	approx. 400 – 500 mm	approx. 1.4 kg
Z2S07456	approx. 500 – 600 mm	approx. 1.6 kg
Z2S07466	approx. 600 – 700 mm	approx. 1.9 kg
Z2S07476	approx. 700 – 800 mm	approx. 2.2 kg
Z2S07486	approx. 800 – 900 mm	approx. 2.5 kg
Z2S07496	approx. 900 – 1,000 mm	approx. 2.8 kg
Upon request	> 1,000 mm	



The type of fastening must be determined by the customer.
Our product consultants and technicians would be glad
to help you clarify all technical details.

We recommend the use of provita substructures when installing the rail below suspended ceilings.

ICS 1

Rail system for gravity infusion

Basis



Height adjustment
range



STAINLESS
STEEL

For pump holder



optional:

Infusion pump holder
Z2N06312 (see
accessories on p. 31)



**Convenient and safe
adjustment thanks to
the single-handed system**



SERIES I1001 / I1021

Stepless one-hand operated

Material Stainless steel

Height adjustment Single-handed system

Bottle holder Stainless steel – 4 safety hooks

Load capacity 2.0 kg / hook, 15.0 kg / sliding hook, 15.0 kg / IV-pole

SLIDING HOOK

To glide a ceiling IV-pole
through the rail

Material Stainless steel / Plastic

For ICS 1 rail, approx. 0.05 kg, Stainless
steel Z2N07032


For series I1001 / I1021, Stainless
steel / Plastic, approx. 0.06 kg Z2N07322

Standard version	for pump holder	Room height	Adjusting range starting from rail upper edge	Weight
I1001252	I1021252	2.5 m	744 – 1,012 mm	approx. 0.7 kg
I1001272	I1021272	2.7 m	844 – 1,212 mm	approx. 0.75 kg
I1001292	I1021292	2.9 m	944 – 1,412 mm	approx. 0.8 kg
I1001312	I1021312	3.1 m	1,044 – 1,612 mm	approx. 0.85 kg
I1001332	I1021332	3.3 m	1,144 – 1,812 mm	approx. 0.9 kg
I1001352	I1021352	3.5 m	1,244 – 2,012 mm	approx. 0.95 kg



Please order sliding hooks separately.

ICS 2



The strong ceiling rail for high loads

High-quality, stable and variable rail profile.



**STRAIGHT & U-SHAPED
CEILING RAILS**
For heavy loads



CEILING POLE
From simple to complex



Material Aluminium

Profile size 57.5 × 47.5 mm



stable and
high quality



for heavy loads




individual
configurable



ICS 2

Rail system for infusion and devices

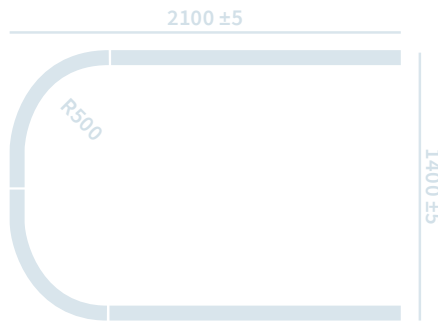

STRAIGHT CEILING RAIL

Sturdy from the beginning to the end

Material Aluminium

Any length through connectors (max. 4,000 mm in one piece)

Load capacity 80.0 kg / m

Standard length 1,000 mm, anodized D1AA001W

Special lengths according to customer requirements, anodized D1AA001W-X

Standard length 1,000 mm, white coated D1AA001A

Special lengths according to customer requirements, white coated D1AA001A-X

U-SHAPED CEILING RAIL

The stable curved solution

Material Aluminium

U-size 2,100 × 1,400 mm, (other sizes available, the minimum width of 1,200 mm is determined by the radius)

Load capacity 80.0 kg / m

Special sizes according to customer requirements

Standard size, anodized D3FB001W

Special lengths according to customer requirements, anodized D3FB001W-X

Standard size, white coated D3FB001A

Special sizes according to customer requirements, white coated D3FB001A-X



END CAP

Cover (with screws)

Material Plastic

Weight approx. 0.02 kg

Z2N07122



END PIECE

Edge stopper for the ceiling rail

Material Aluminium

Weight approx. 0.01 kg

Z2N07112



CUT-OUT

To insert different ceiling poles

Z2N07012




CONNECTOR

To connect two rails

Material Aluminium

Weight approx. 0.05 kg

Z2N07062

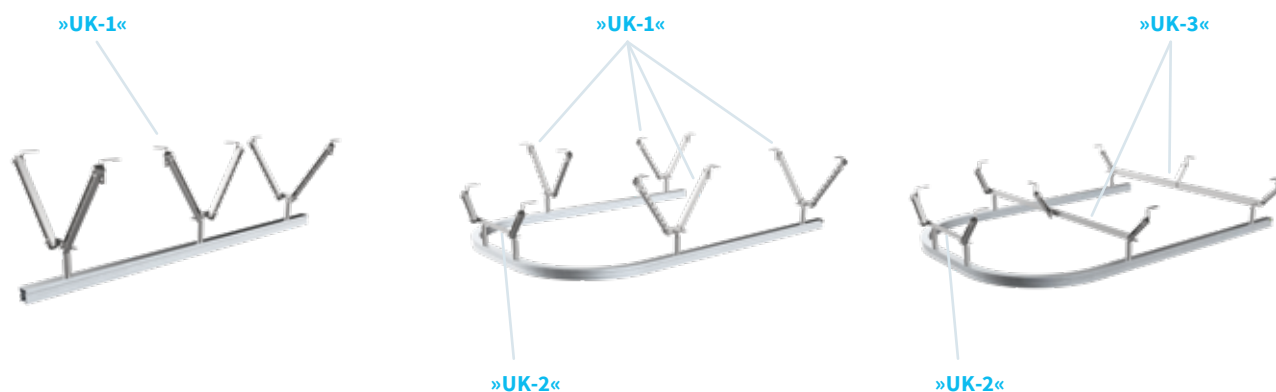

SUBSTRUCTURE STRAIGHT RAIL

Straight rails require
a spacer of version
“UK-1” every 800 mm

SUBSTRUCTURE U-RAIL

Variant 1


Standard U-rails require
4 spacers of version
“UK-1” and 1 version “UK-2”

Variant 2

Standard U-rails require
4 spacers of version
“UK-3” and 1 version “UK-2”

»UK-1«	»UK-2«	»UK-3«	Distance
Z2S07266	Z2S07736	Z2S07886	approx. 250 – 300 mm
Z2S07676	Z2S07746	Z2S07896	approx. 300 – 350 mm
Z2S07686	Z2S07756	Z2S07906	approx. 350 – 450 mm
Z2S07696	Z2S07766	Z2S07916	approx. 400 – 550 mm
Z2S07716	Z2S07776	Z2S07926	approx. 550 – 760 mm
Z2S07726	Z2S07786	Z2S07936	approx. 760 – 1,000 mm
Upon request			> 1,000 mm

mountable on
different levels

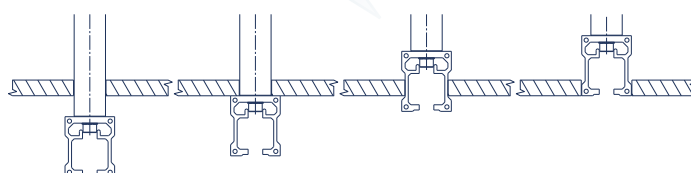

And the levels are as followed:
with a gap in between,
directly below or integrated
in the suspended ceiling



ICS 2 “MONO-SET”

**Moveable and flexible:
Application-oriented set-up
of the work area**

Material Aluminium

Number of ceiling rails 2 rails (parallel) + 1 connecting rail

Length of carrying rails 2,500 mm

Length of connecting rail 2,500 mm

Profile size 57.5 × 47.5 mm

white coated D2MONOSA

anodized D2MONOSW



“MONO” CARRIER RAIL

Material Aluminium

Suitable for parallel rail systems

Bearing 16 nylon ball bearings (4 pieces per cart)

Length of carrying rails 2,500 mm

white coated D400002A

anodized D400002W

Individually configurable!
**Our product consultants and technicians would be glad
to help you clarify all technical details.**



ICS 2 “DUO-SET 1” Stable ceiling cart movable in two directions

Material Aluminium

Number of ceiling rails 2 rails (parallel)

Length of ceiling rails each 2,500 mm

Profile size 57.5 × 47.5 mm

Ceiling cart with two tandem carriers

white coated D2DUOS1A

anodized D2DUOS1W



ICS 2 “DUO-SET 2” Stable ceiling cart movable in four directions

Material Aluminium

Number of ceiling rails 2 rails (parallel)

Length of ceiling rails variable

Profile size 57.5 × 47.5 mm

Length of connecting rails 2,500 mm

Length of carrying rails 2,500 mm

white coated D2DUOS2A

anodized D2DUOS2W



“DUO” CARRIER RAIL

Material Aluminium

Suitable for parallel rail systems

Bearing 16 nylon ball bearings (4 pieces per cart)


Length of carrying rails 2,500 mm

white coated D400012A

anodized D400012W

ICS 2 ceiling poles overview

For gravity infusion

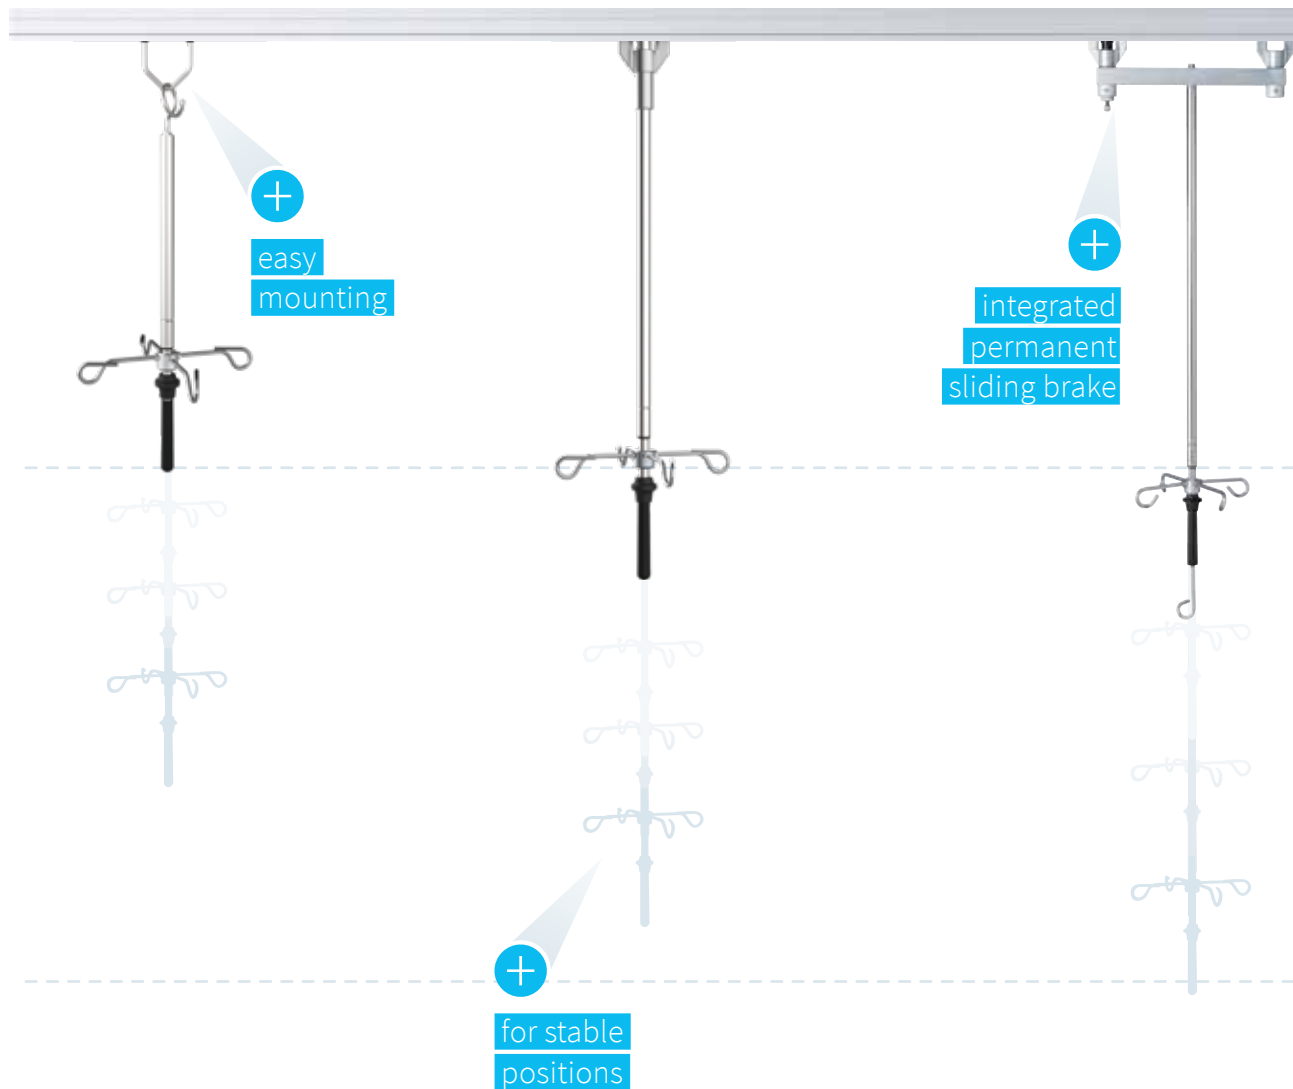

SERIES I1001 / I1021

For ICS 1/ICS 2 or for simply mounting on the ceiling

SERIES I1002 / I1022

With integrated automatic-locking system and permanent sliding brake

SERIES I103

On tandem carriers with 4-fold bearing and permanent (adjustable), conductive sliding brake

For infusion and device management



SERIES I205
Ceiling rod on tandem carriers with integrated brake mechanism

SERIES I206
On tandem carriers with integrated brake mechanism and an additional rod

SERIES I207
On tandem carriers with integrated brake mechanism and venotonometer rod


For complex device management



SERIES I010
With permanent (adjustable), conductive sliding brake


Basis

For pump holder

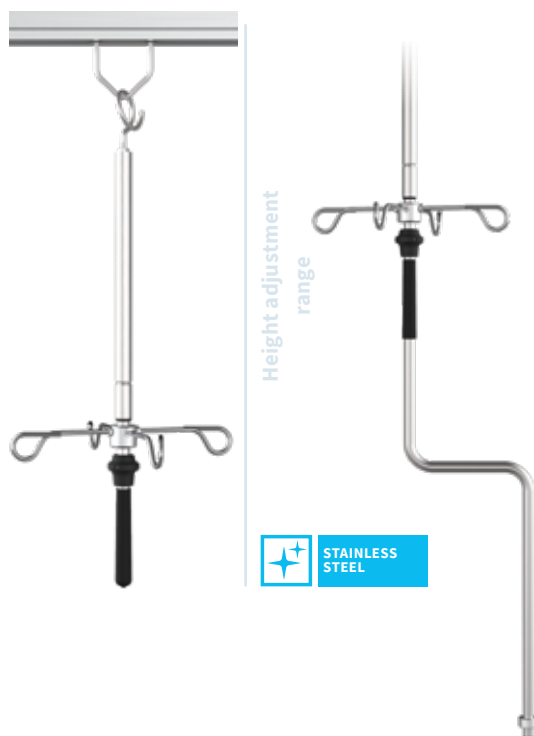

Basis

For pump holder

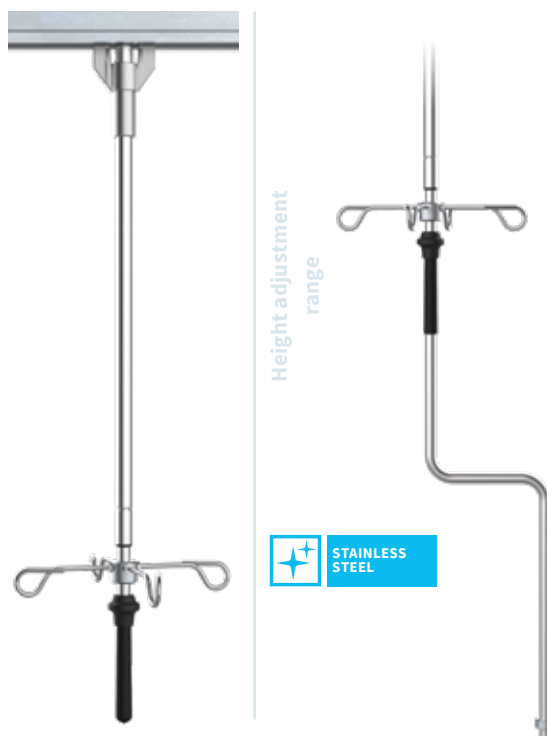

SERIES I1001 / I1021 Stepless one-hand operated

Material Stainless steel

Tube diameter 18 / 14 mm

Height adjustment Single-handed system

Bottle holder Stainless steel – 4 safety hooks

Load capacity 2.0 kg / hook, 15.0 kg / sliding hook, 15.0 kg / IV-pole

Standard version	for pump holder	Room height	Adjusting range starting from rail upper edge	Weight
I1001252	I1021252	2.5 m	approx. 772 – 1,040 mm	approx. 0.7 kg
I1001272	I1021272	2.7 m	approx. 872 – 1,240 mm	approx. 0.75 kg
I1001292	I1021292	2.9 m	approx. 972 – 1,440 mm	approx. 0.8 kg
I1001312	I1021312	3.1 m	approx. 1,072 – 1,640 mm	approx. 0.85 kg
I1001332	I1021332	3.3 m	approx. 1,172 – 1,840 mm	approx. 0.9 kg
I1001352	I1021352	3.5 m	approx. 1,272 – 2,040 mm	approx. 0.95 kg



Please order sliding hooks separately.

optional:

Infusion pump holder Z2N06312 (see accessories on p. 31)

SERIES I1002 / I1022 For stable positions

Material Stainless steel / Aluminium

Tube diameter 18 / 14 mm

Height adjustment Single-handed system

Bottle holder Stainless steel – 4 safety hooks

Load capacity 2.0 kg / hook, 15.0 kg / IV-pole, 20.0 kg / cart

Bearing 4 low-noise nylon bearings

Special feature Cart with automatic locking system and permanent sliding brake

Standard version	for pump holder	Room height	Adjusting range starting from rail upper edge	Weight
I1002252	I1022252	2.5 m	approx. 713 – 981 mm	approx. 0.75 kg
I1002272	I1022272	2.7 m**	approx. 813 – 1,181 mm	approx. 0.8 kg

** Series I1002 / I1022 is not designed to change positions frequently but primarily for a stable use. For a procedure, the pole must be pulled down with both hands in order to intentionally move positions. For frequent movements, we recommend the series I103, especially for bigger room heights.



SERIES I103 Permantent sliding brake

Material Stainless steel / Aluminium

Tube diameter 18 / 14 mm

Height adjustment Single-handed system

Bottle holder Stainless steel – 5 safety hooks

Load capacity 3.0 kg / hook, 15.0 kg / IV-pole, 40.0 kg / cart

Bearing 8 low-noise nylon bearings

Special feature easy movements through tandem carriers, integrated permanent sliding brake



**Convenient and safe
adjustment thanks
to the single-handed
system**

Room height **Height adjustment range** **Weight**

I1032252	2.5 m	approx. 800 – 1,070 mm	approx. 2.35 kg
I1032272	2.7 m	approx. 900 – 1,270 mm	approx. 2.4 kg
I1032292	2.9 m	approx. 1,000 – 1,470 mm	approx. 2.45 kg
I1032312	3.1 m	approx. 1,100 – 1,670 mm	approx. 2.5 kg
I1032332	3.3 m	approx. 1,200 – 1,870 mm	approx. 2.55 kg
I1032352	3.5 m	approx. 1,300 – 2,070 mm	approx. 2.6 kg

ICS 2

Ceiling poles



SERIES I205

Good running properties

Material Stainless steel / Aluminium

Tube diameter 25 mm

Tandem carrier safe positioning thanks to its integrated locking brake

Bottle holder 4 safety hooks, height adjustable

Load capacity 2.0 kg / hook, 40.0 kg / IV-pole

Bearing 8 low-noise nylon bearings

Special feature incl. grounding ring, 1,160 mm usable space for the attachment of devices

	Room height	Carrier tube length	Weight
I2052592	2.5 m	approx. 1,550 mm	approx. 3.5 kg
I2052792	2.7 m	approx. 1,750 mm	approx. 3.75 kg
I2052992	2.9 m	approx. 1,950 mm	approx. 4.0 kg
I2052312	3.1 m	approx. 2,150 mm	approx. 4.25 kg



high-quality 4-fold bearing with conductive central brake



SERIES I206 / I207 Additional carrier rod

Material Stainless steel / Aluminium

Tube diameter 25 mm

Tandem carrier safe positioning thanks to its integrated locking brake

Bottle holder 2 pieces, 4 safety hooks, height adjustable

Load capacity 2.0 kg / hook, 40.0 kg / IV-pole

Bearing 8 low-noise nylon bearings

Special feature incl. grounding ring



* with venotonometer rod to position the venous pressure measuring tube at thoracic height level

Series I206	Room height	Carrier tube length	Weight
I2062592	2.5 m	approx. 1,550 mm	approx. 6.3 kg
I2062792	2.7 m	approx. 1,750 mm	approx. 6.7 kg
I2062992	2.9 m	approx. 1,950 mm	approx. 7.1 kg
I2062312	3.1 m	approx. 2,150 mm	approx. 7.5 kg
Series I207*	Room height	Carrier tube length	Weight
I2072592	2.5 m	approx. 1,350 mm	approx. 6.5 kg
I2072792	2.7 m	approx. 1,550 mm	approx. 6.9 kg
I2072992	2.9 m	approx. 1,750 mm	approx. 7.3 kg
I2072312	3.1 m	approx. 1,950 mm	approx. 7.7 kg



SERIES I010 Especially for heavy medical devices

Material Stainless steel / Aluminium

Tube diameter 25 mm

Tandem carrier automatic locking system and permanent sliding brake

System load capacity max. 40.0 kg (mono rail)
max. 80.0 kg (dual rail)

Tray load capacity max. 40.0 kg

Bearing 8 low-noise nylon bearings (mono rail)
16 low-noise nylon bearings (dual rail)

Special feature with the dual version, the cart runs in 2 parallel ceiling rails (centre distance = 300 mm), which prevents it from swivelling out sideways

With one tray, usable area 640 × 340 mm

Mono rail for 1 ceiling rail I0100002

Dual rail for 2 parallel ceiling rails I0100062

With one tray, usable area 440 × 340 mm

Mono rail for 1 ceiling rail I0100012

Dual rail for 2 parallel ceiling rails I0100072

With two trays, usable area 640 × 340 mm

Mono rail for 1 ceiling rail I0100022

Dual rail for 2 parallel ceiling rails I0100042


With two trays, usable area 440 × 340 mm

Mono rail for 1 ceiling rail I0100032

Dual rail for 2 parallel ceiling rails I0100052



ICS 3



The swivelling ceiling solution for maximum flexibility

Swivelling and rotating support system
for optimum use of space
and freedom of movement.

CARRIER SYSTEM For infusion & device management

Material 2 Stainless steel tubes Ø 25 mm and 2 Stainless steel equipment rails 25 × 10 mm (mounting frame), 6 Aluminium clamps

Bottle holder Stainless steel – 2 bottle holder, each 3 safety hooks

Load capacity 5.0 kg / hook, 40.0 kg system

Angle of rotation 320°

Working radius Ø 1,800 mm

Special features Distance of the frame to the floor approx. 1,000 – 1,200 mm for the following room heights

	Room height	Total weight
Z2N02252	2.5 – 2.7 m	approx. 45.0 kg
Z2N02272	2.7 – 2.9 m	approx. 50.0 kg
Z2N02292	2.9 – 3.1 m	approx. 55.0 kg

Grounding ring with 4 connecting pins P0AG S6/15

Power supply integrated into arm


Special information mounting material is not included. Please order a ceiling cover separately



three pivot joints
allow swivelling
into working area
or parking position



optimum
space utilisation

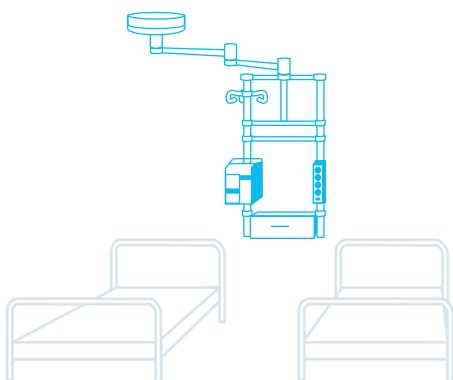


The type of fastening must be determined by the customer.
Our product consultants and technicians would be glad to
help you clarify all technical details.



maximum freedom
of movement in close
proximity to the patient

ICS 4



The rail system with integrated power and network supply

Our flexible premium solution
for ceilings.

ICS 4 SYSTEM

High-quality guided profile
with abrasion-resistant surfaces

Material Aluminium / Steel sheet coated

Profile size 300 × 120 mm

Profile length 2,500 mm

Colour of the profile white

Power supply integrated in profile

Total load capacity of the rail 100.0 kg

Travelling cables power and network supply

Braking system integrated in cart

Weight rail approx. 30.0 kg

D425000A



ICS 4


Rail system with integrated power and network supply



+ professional roller guide enables an easy movement

+ integrated cable routing


Spacers to bridge suspended ceilings

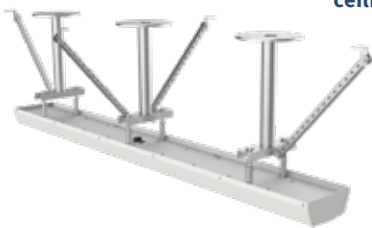

The type of fastening must be determined by the customer. Our product consultants and technicians would be glad to help you clarify all technical details.

+ a nearly maximum radius of action (approx. 340°)

Ceiling rails



The right accessories

The right choice for professional and patient-oriented equipment.

FIND YOUR ACCESSORIES FOR:



Accessories

Ceiling rails



ICS 1

CEILING HOOK

To mount at a fixed point, a rail is not required for this ceiling hook

Material Stainless steel

Weight approx. 0.05 kg

Z2N07022



ICS 1

ICS 2

SLIDING HOOK

To glide a ceiling IV-pole through the rail

Material Stainless steel/Plastic

for ICS 1 rail approx. 0.05 kg Z2N07032

for ICS 2 rail approx. 0.06 kg Z2N07322



ICS 1

ICS 2

INFUSION PUMP HOLDER

One pump holder that can be screwed into the pole handle. Due to this pump holder, the centre of gravity will remain under suspension, enabling the pole to also remain vertical

Material Stainless steel/Plastic

Safety ring prevents the attached devices from sliding down

Weight approx. 0.9 kg

For series I1021 / I1022 / I103 Z2N06342



ICS 3

ICS 4

MONITOR ARM

For monitors with a VESA 75 / 100 bracket

Max. weight load 23 kg

Max. monitor weight 14 kg

Carrier arm length 250 mm

Swivel range on wall side ±90°

Swivel range on monitor side ±90°

Tilting range ±20°

Colour RAL 7035 light grey

For mounting on wall rail

Weight approx. 2.55 kg Z-DOCK64

For mounting on round tubes

Ø 35–38 mm

Weight approx. 2.61 kg Z-DOCK65



ICS 2

INFUSION PUMP HOLDER

For round tube Ø 25 mm, height adjustable, for two pumps (cannot be retrofitted)

Material Stainless steel/Plastic

Weight approx. 0.95 kg

For series I205 / I206 / I207 Z2N06312



ICS 2

CABLE CART

For carrying power and grounding cables through the rail

Material Plastic

Weight approx. 0.1 kg

Z2K06354

Recommendation:

1 cable cart / 1 m cable length

Accessories

Ceiling rails



EQUIPMENT RAIL


Two-sided, 25 × 10 mm,
for ceiling cart series I 010,
with 2 clamps for round tube Ø 25 mm

Material Stainless steel/Aluminium

Weight approx. 0.95 kg / approx. 1.1 kg

Length 400 mm Z2N07212

Length 600 mm Z2N07202



TRAY

With 2 clamps for round tube Ø 25 mm,
for ceiling cart series I 010

Material Aluminium, coated

Weight approx. 4.4 kg / approx. 5.7 kg

440 × 340 mm Z2N07252

640 × 340 mm Z2N07262



SAFETY BOTTLE HOLDER

For round tube Ø 25 mm,
height adjustable, 4 hooks
(cannot be retrofitted)

Material Stainless steel/Plastic

Load capacity 2.0 kg / hook

Weight approx. 0.25 kg

Z2N06322



BASKET WITH CLAMPS

For equipment rail 25 × 10 mm

Material Steel powdered / Aluminium

Colour light grey

Size 250 × 90 × 200 mm

Weight approx. 1.7 kg

Z2S0665N



GROUNDING RING

For round tube Ø 25 mm,
for ceiling pole and ceiling cart

Material Aluminium

Grounding ring with 4 connecting pins
PoAG S6/15

Locking with star grip

Weight approx. 0.2 kg

Z2N07072



COVER

With attachment ring

Material Plastic

Colour white

Diameter 320 mm

Height 85 mm

Weight approx. 0.5 kg

Z2K0699A



PUMP HOLDER

With wall rail clamp for mounting
on equipment rail 25 × 10 mm

Material Stainless steel/Aluminium

Tube diameter 25 mm

Length 500 mm

Weight approx. 0.65 kg

Z2N07162



SHELF

With two wall rail clamps,
with edge protection

Material Stainless steel/Aluminium

Shelf size 300 × 250 mm

Load capacity 4.0 kg

Weight approx. 2.75 kg

Z2N07332



MONITOR SHELF WITHOUT DRAWER

With two wall rail clamps and
wall support, with edge protection

Material Stainless steel/Steel, white
coated

Shelf size 540 × 360 mm

Load capacity 40.0 kg

Weight approx. 6.0 kg

optional with 1 or 2 drawers

Z2N07442



LAMPS

For fixtures see lamp catalogue

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

www.provita.nt-rt.ru | | pia@nt-rt.ru